



# A4900 - Vibrio M Ex

Vibration meter and Data collector



II 2 G Ex ib IIC T4 Gb

# Adash

... Your best partner for vibration diagnostics



# A4900 Vibrio M Ex - Data collector in intrinsically safe version



The A4900 - Vibrio M Ex instrument allows you to perform all basic vibro-diagnostics measurements such as bearing condition, identification of mechanical faults and lubrication assessment.

The A4900 - Vibrio M Ex is equipped with 4MB memory for data storage. Data memory allows you to perform off-route and route measurements. New professional software DDS 2014 for Vibrio M Ex can be downloaded from Adash website free of charge.


Expert system for automatic machine fault detection is included.

- Quality Ex sensor
- Solid coiled cable
- Strong magnetic base



Basic measurements:  
 - ISO value [mm/s, ips]  
 - Bearing value [g]  
 - ISO 10816-3 included

Automatic speed detection

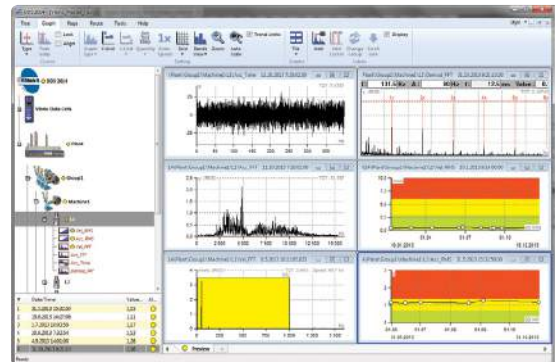


free DDS 2014 software




Time signals



FFT Spectrum



Bearing bands



Route measurement



## Evaluate measured data right on site

Machine OK




Expert system



Unbalance



Looseness



Misalignment



Bearing faults

Top panel:

- ACC ICP® - sensor input
- Stethoscope output - 3,5 mm jack
- USB for data transfer  
(integrated in sensor input)



Simple to use:

- Three buttons operation
- All functions are predefined
- Expert functions for faults detection
- Colour graphic display



Industrial design:

- Heavy-Duty aluminium case
- Energizer L91 Ultimate Lithium AA batteries
- 7 hours operation



## Adash 4900 – Vibrio M Ex Technical Specifications:

Input:	1x ICP® powered Ex accelerometer (AC90x or AC91x)	Software:	DDS 2014 software for Vibrio M Ex (free download)														
Input range:	60 g PEAK with standard 100mV/g sensor	Display:	colour graphic OLED display 128 x 128 pixels, diagonal 1,5" (38mm)														
Measurements:	Velocity RMS 10 - 1000 Hz [mm/s, ips] Velocity Peak 10 - 1000 Hz [mm/s, ips] Acceleration RMS 500 - 16000 Hz [g] Acceleration Peak 500 - 16000 Hz [g] Velocity time 1 - 1000 Hz [mm/s, ips] 2048 samples * Velocity spectrum 1 - 1000 Hz [mm/s, ips] 800 lines Acceleration time 1 - 16000 Hz [g] 2048 samples * Acceleration spectrum 1 - 16000 Hz [g] 800 lines * Acceleration Demod-Envelope RMS 500 - 16000 Hz [g] Acceleration Demod-Envelope Peak 500 - 16000 Hz [g] * Acceleration Demod-Envelope time 500 - 16000 Hz [g] 2048 samples Acceleration Demod-Envelope spectrum 500 - 16000 Hz [g] 800 lines, range 400 Hz *	Output:	1x AC signal 8 Ω / 0,5 W for external headphones (signal listening)														
	Displacement RMS 2 - 100 Hz [μm, mil] Displacement 0 - Peak 2 - 100 Hz [μm, mil] Displacement Peak - Peak 2 - 100 Hz [μm, mil]	Power:	2x AA 1.5V batteries (Energizer L91 Ultimate Lithium - 7 hours operation)														
Further functions:	vibration stethoscope	Temp:	Operating: -20°C to 50°C														
Memory:	4 MB for data 900 measurements of 800 lines spectra or 2048 samples time, signals may be stored	Dimensions:	150 x 60 x 35 mm														
Data storing (option):	Off-Route Route with DDS 2014 software for Vibrio M Ex	Weight:	330 g including batteries (without cable, sensor and magnet) 540 g including batteries, cable, sensor and magnet														
Interface:	USB 2.0 compatible	Accessories:	Ex vibration sensor (AC90x or AC91x), coiled cable to connect vibration sensor, magnetic base for vibration sensor, headphones with 3,5 mm jack, special USB cable, measuring tip for manual pressure on the sensor, transport case, CD with the manual														
		II 2 G Ex ib IIC T4 Gb:	<table border="0"> <tr> <td>II</td> <td>Non-mining</td> </tr> <tr> <td>2</td> <td>Zone 1</td> </tr> <tr> <td>G</td> <td>Gas atmosphere</td> </tr> <tr> <td>Ex ib</td> <td>Principle of protection: Intrinsic Safety EN 60079-11 , Zone 1</td> </tr> <tr> <td>IIC</td> <td>Gas group - Acetylene, Hydrogen</td> </tr> <tr> <td>T4</td> <td>Temperature class – 135°C</td> </tr> <tr> <td>Gb</td> <td>Equipment Protection Level – Zone 1 (high protection)</td> </tr> </table>	II	Non-mining	2	Zone 1	G	Gas atmosphere	Ex ib	Principle of protection: Intrinsic Safety EN 60079-11 , Zone 1	IIC	Gas group - Acetylene, Hydrogen	T4	Temperature class – 135°C	Gb	Equipment Protection Level – Zone 1 (high protection)
II	Non-mining																
2	Zone 1																
G	Gas atmosphere																
Ex ib	Principle of protection: Intrinsic Safety EN 60079-11 , Zone 1																
IIC	Gas group - Acetylene, Hydrogen																
T4	Temperature class – 135°C																
Gb	Equipment Protection Level – Zone 1 (high protection)																



\* Available in DDS2014 software for Vibrio M Ex



Your partner in reliability

Tel. 976 200 969 · Fax 976 362 340  
www.preditec.com · info@preditec.com  
Oficinas en: Madrid, Zaragoza, Barcelona,  
Albacete, A Couña, Tarragona y Cádiz

Adash, spol. s r.o.  
Hlubinska 1379/32  
702 00 Ostrava  
Czech Republic



e-mail: info@adash.com  
tel.: +420 59 623 2670  
+420 59 623 2687  
fax.: +420 59 623 2671

www.adash.com

