

OilWear® is a range of online sensors for monitoring particles in fluids. They are based on a patented technology of digital image and video processing, which achieves outstanding and reliable results at low cost.



OilWear® COUNTER SERIES



atten2's OilWear® C100 is an online sensor that quantifies particles larger than **4μ** present in fluids, and classifies them by size according to **ISO, NAS or SAE** standards. This is a low cost sensor designed to be permanently installed on a machine, or to be installed on multiple machines, providing **real-time** information on contamination of fluids.

OilWear® C100 provides key information to carry out a **predictive maintenance** strategy. The measure of an abnormal amount of particles allows the detection of early stages of machine failure and implementation of corrective actions.

OilWear® S100 has a fully **modular design**, and its measure module, which is the main responsible for the counting and classification of the particles, can be easily integrated into the oil **Condition Monitoring System**, simply ensuring minimum flow conditions in the oil that is monitored.

OilWear® C100



Your partner in reliability

APPLICATIONS

- Component wash fluids
- Cutting fluids
- Aqueous solutions
- Coolants
- Water glycols
- Mineral and synthetic oils
- Hydraulic and lubricating fluids
- Fuels



BENEFITS


- Plug & Play, the sensor offers a standard output with single plug.
- Output: ISO 4406, NAS 1638, SAE AS4059, etc.
- Early information on the state of the machine is provided.
- It prolongs the life of the fluids and cuts machine downtime.
- It provides rapid, reliable information on the contamination of the fluids.
- Full integration with SCADA/PC/PLC by means of analogue and digital communications.
- Self-diagnosis, self-calibration and self-compensation.
- Possibility of stipulating warning levels.
- Possibility of stipulating the size ranges of the particles to be counted.
- Possibility of integrating with OilHealth®, whereby a single sensor provides information on oil degradation and contamination.

SPECIFICATIONS

OilWear® C 100

MEASURED VARIABLES	Particle classification according to: ISO 4406:1999 // SAE 4059 ISO4406:1987 // NAS 1638
CALIBRATION	ISO 11171
PRECISION	±1 ISO code
ADDITIONAL VARIABLES	Temperature Sensor Air Bubble detection
MOUNTING POSITION	Vertical
SUPPLY VOLTAGE	24 V
POWER CONSUMPTION	<1A
ANALOG OUTPUT	0-10 V (4-20 mA) [Upon Request]
DIGITAL OUTPUT	RS485 (ModBUS: RTU) Ethernet RJ45 (ModBUS: TCP/IP, FTP, Telnet)
ALARMS	3 configurable alarms per level [Upon Request]
OPERATING PRESSURE	Maximum 20 bar
OPERATING TEMPERATURE	From 0°C to 70 °C
VISCOSITY RANGE	To 460 cSt
FLOW RATE	Self-regulated
SENSOR SIZE/WEIGHT	250 x 175 x 115mm / 3.000 gr
HYDRAULIC CONNECTIONS	1/8" BSP (x2)
MATERIALS	Stainless steel
MEMORY	Last 500 samples (measurement and sample image)
PROTECTION CLASS	IP65
CERTIFICATIONS	CE, GL pending

DIMENSIONS

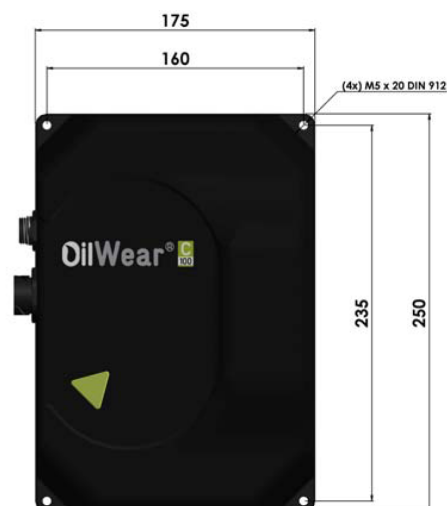

Your partner in reliability

Tel. 976 200 969 · Tel. 916 121 163 · Fax 976 362 340
www.preditec.com · www.irm.es · info@preditec.com
 Oficinas en: Madrid, Zaragoza, Barcelona, Albacete,
 A Couña, Tarragona y Cádiz

atten2

info@atten2.com
www.atten2.com